


# Frese in metallo duro per uso altamente professionale

## Taglio INOX per acciaio inossidabile (INOX)




### Forma a sfera KUD

Fresa a sfera conforme alle Norme DIN 8032.

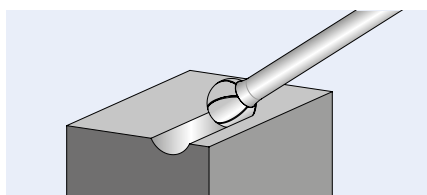

#### PFERDVALUE:

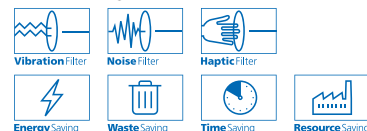

| $d_1$<br>[mm] | $l_2$<br>[mm] | $d_2$<br>[mm] | $l_1$<br>[mm] | Taglio<br>INOX<br> | giri/min |  | Descrizione |
|---------------|---------------|---------------|---------------|-----------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------|-------------|
|               |               |               |               | EAN 4007220                                                                                         |          |                                                                                     |             |

#### Diam. gambo 3 mm

|   |   |   |    |        |               |   |                 |
|---|---|---|----|--------|---------------|---|-----------------|
| 3 | 2 | 3 | 33 | 930434 | 27.000–64.000 | 1 | KUD 0302/3 INOX |
| 4 | 3 | 3 | 34 | 034439 | 20.000–48.000 | 1 | KUD 0403/3 INOX |
| 5 | 4 | 3 | 35 | 034446 | 16.000–40.000 | 1 | KUD 0504/3 INOX |
| 6 | 5 | 3 | 35 | 930441 | 13.000–32.000 | 1 | KUD 0605/3 INOX |


#### Diam. gambo 6 mm

|    |    |   |    |        |               |   |                 |
|----|----|---|----|--------|---------------|---|-----------------|
| 6  | 5  | 6 | 45 | 900536 | 13.000–32.000 | 1 | KUD 0605/6 INOX |
| 8  | 7  | 6 | 47 | 952269 | 10.000–24.000 | 1 | KUD 0807/6 INOX |
| 10 | 9  | 6 | 49 | 952276 | 8.000–19.000  | 1 | KUD 1009/6 INOX |
| 12 | 10 | 6 | 51 | 900543 | 7.000–16.000  | 1 | KUD 1210/6 INOX |




### Forma cilindrica con testa a sfera WRC

Fresa cilindrica con testa a sfera conforme alle Norme DIN 8032. Combinazione tra le geometrie cilindrica e a sfera.

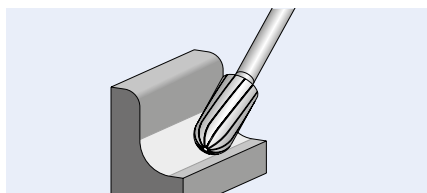

#### PFERDVALUE:

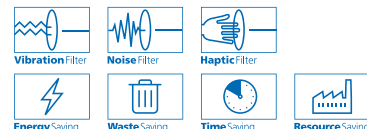

| $d_1$<br>[mm] | $l_2$<br>[mm] | $d_2$<br>[mm] | $l_1$<br>[mm] | Taglio<br>INOX<br> | giri/min |  | Descrizione |
|---------------|---------------|---------------|---------------|-------------------------------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------|-------------|
|               |               |               |               | EAN 4007220                                                                                           |          |                                                                                       |             |

#### Diam. gambo 3 mm

|   |    |   |    |        |               |   |                 |
|---|----|---|----|--------|---------------|---|-----------------|
| 3 | 13 | 3 | 43 | 930410 | 27.000–64.000 | 1 | WRC 0313/3 INOX |
| 6 | 13 | 3 | 43 | 930427 | 13.000–32.000 | 1 | WRC 0613/3 INOX |

#### Diam. gambo 6 mm

|    |    |   |    |        |               |   |                 |
|----|----|---|----|--------|---------------|---|-----------------|
| 6  | 16 | 6 | 55 | 900512 | 13.000–32.000 | 1 | WRC 0616/6 INOX |
| 8  | 20 | 6 | 60 | 952283 | 10.000–24.000 | 1 | WRC 0820/6 INOX |
| 10 | 20 | 6 | 60 | 952290 | 8.000–19.000  | 1 | WRC 1020/6 INOX |
| 12 | 25 | 6 | 65 | 900529 | 7.000–16.000  | 1 | WRC 1225/6 INOX |

