




Forma a fiamma B

Fresa a fiamma conforme alle Norme ISO 7755/8.

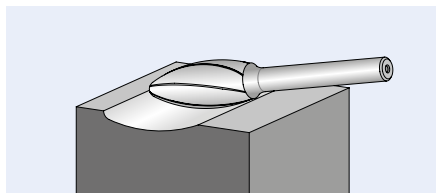

PFERDVALUE:



Vibration Filter



Noise Filter



Haptic Filter



Energy Saving



Waste Saving



Time Saving



Resource Saving




d_1 [mm]	l_2 [mm]	d_2 [mm]	l_1 [mm]	r [mm]	Taglio INOX	giri/min		Descrizione
								
EAN 4007220								

Diam. gambo 6 mm

8	20	6	60	1,5	952306	10.000–24.000	1	B 0820/6 INOX
10	25	6	65	1,7	952313	8.000–19.000	1	B 1025/6 INOX
12	30	6	70	2,1	930502	7.000–16.000	1	B 1230/6 INOX

Forma a ogiva SPG

Fresa a ogiva conforme alle Norme DIN 8032. Punta spianata.

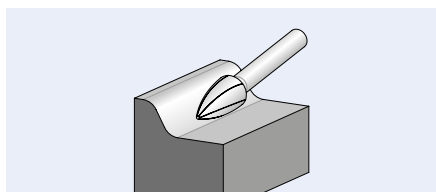

PFERDVALUE:



Vibration Filter



Noise Filter



Haptic Filter



Energy Saving



Waste Saving



Time Saving



Resource Saving



d_1 [mm]	l_2 [mm]	d_2 [mm]	l_1 [mm]	Taglio INOX	giri/min		Descrizione
							
EAN 4007220							

Diam. gambo 3 mm

3	7	3	37	034491	27.000–64.000	1	SPG 0307/3 INOX
	13	3	43	034507	27.000–64.000	1	SPG 0313/3 INOX
6	13	3	43	034514	13.000–32.000	1	SPG 0613/3 INOX

Diam. gambo 6 mm

6	18	6	55	936948	13.000–32.000	1	SPG 0618/6 INOX
8	20	6	60	952320	10.000–24.000	1	SPG 0820/6 INOX
10	20	6	60	952337	8.000–19.000	1	SPG 1020/6 INOX
12	25	6	65	936894	7.000–16.000	1	SPG 1225/6 INOX

