





Forma a ogiva SPG

Fresa a ogiva conforme alle Norme DIN 8032. Punta spianata.

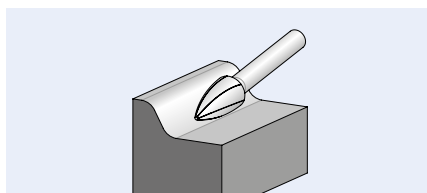

PFERDVALUE:

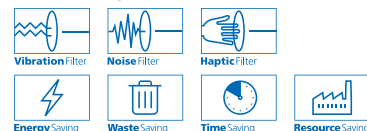


d_1 [mm]	l_2 [mm]	d_2 [mm]	l_1 [mm]	Taglio CAST 	giri/min		Descrizione
				EAN 4007220			

Diam. gambo 6 mm

6	18	6	55	952580	24.000–40.000	1	SPG 0618/6 CAST
10	20	6	60	952597	14.000–24.000	1	SPG 1020/6 CAST
12	25	6	70	952603	12.000–20.000	1	SPG 1225/6 CAST


Diam. gambo 8 mm

12	25	8	70	067956	12.000–20.000	1	SPG 1225/8 CAST
----	----	---	----	--------	---------------	---	-----------------




Forma a cono con punta arrotondata KEL

Fresa a cono con punta arrotondata conforme alle Norme DIN 8032.

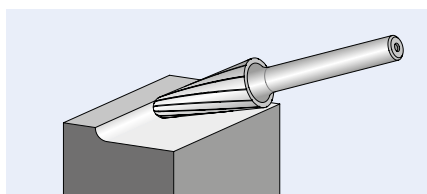

PFERDVALUE:

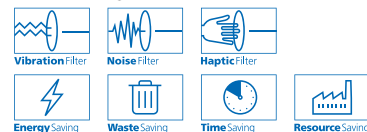

d_1 [mm]	l_2 [mm]	d_2 [mm]	l_1 [mm]	α	r [mm]	Taglio CAST 	giri/min		Descrizione
						EAN 4007220			

Diam. gambo 6 mm

12	30	6	70	14°	2,6	952474	12.000–20.000	1	KEL 1230/6 CAST
----	----	---	----	-----	-----	--------	---------------	---	-----------------

Diam. gambo 8 mm

12	30	8	70	14°	2,6	068014	12.000–20.000	1	KEL 1230/8 CAST
----	----	---	----	-----	-----	--------	---------------	---	-----------------