


Forma a cono appuntito SKM

Fresa a cono appuntito conforme alle Norme DIN 8032. Punta spianata.



PFERDVALUE:

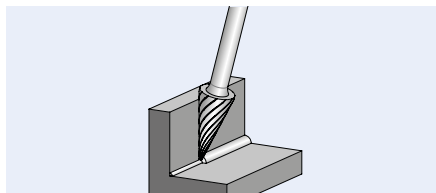

Vibration Filter



Noise Filter



Haptic Filter



Energy Saving



Waste Saving



Time Saving



Resource Saving




d_1 [mm]	l_2 [mm]	d_2 [mm]	l_1 [mm]	α	Taglio CAST 	giri/min		Descrizione
					EAN 4007220			

Diam. gambo 6 mm

12	25	6	65	26°	952481	12.000–20.000	1	SKM 1225/6 CAST
----	----	---	----	-----	--------	---------------	---	-----------------

Forma ad albero RBF

Fresa ad albero conforme alle Norme DIN 8032.

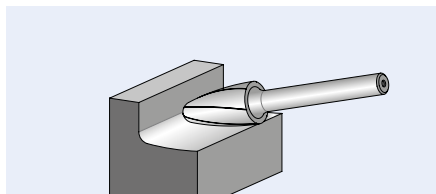

PFERDVALUE:



Vibration Filter



Noise Filter



Haptic Filter



Energy Saving




Waste Saving



Time Saving



Resource Saving



d_1 [mm]	l_2 [mm]	d_2 [mm]	l_1 [mm]	r [mm]	Taglio CAST 	giri/min		Descrizione
					EAN 4007220			

Diam. gambo 6 mm


6	18	6	55	1,5	952528	24.000–40.000	1	RBF 0618/6 CAST
10	20	6	60	2,5	952559	14.000–24.000	1	RBF 1020/6 CAST
12	25	6	65	2,5	952566	12.000–20.000	1	RBF 1225/6 CAST

Diam. gambo 8 mm

12	25	8	65	2,5	067949	12.000–20.000	1	RBF 1225/8 CAST
----	----	---	----	-----	--------	---------------	---	-----------------

Forma a goccia TRE

Fresa a goccia conforme alle Norme DIN 8032.

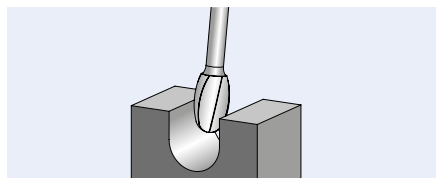

PFERDVALUE:



Vibration Filter



Noise Filter



Haptic Filter



Energy Saving



Waste Saving



Time Saving



Resource Saving



d_1 [mm]	l_2 [mm]	d_2 [mm]	l_1 [mm]	r [mm]	Taglio CAST 	giri/min		Descrizione
					EAN 4007220			

Diam. gambo 6 mm

12	20	6	60	5,0	952467	12.000–20.000	1	TRE 1220/6 CAST
----	----	---	----	-----	--------	---------------	---	-----------------