


Forma a fiamma B



Fresa a fiamma conforme alle Norme ISO 7755/8.

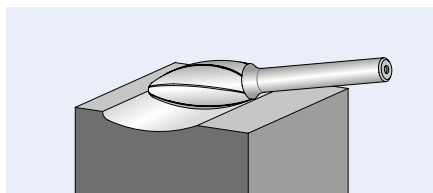

Indicazioni per ordinare:

- Completare la descrizione articolo con il taglio richiesto.

PFERDVALUE:




d ₁ [mm]	l ₂ [mm]	d ₂ [mm]	l ₁ [mm]	r [mm]	Taglio		giri/min		Descrizione
					INOX	INOX HC-FEP			
									
					EAN 4007220				

Diam. gambo 6 mm

8	20	6	60	1,5	952306	-	10.000–24.000	1	B 0820/6 ...
10	25	6	65	1,7	952313	N! 222287	8.000–19.000	1	B 1025/6 ...
12	30	6	70	2,1	930502	N! 222294	7.000–16.000	1	B 1230/6 ...

Forma a ogiva SPG



Fresa a ogiva conforme alle Norme DIN 8032. Punta spianata.

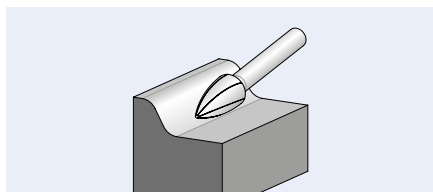

Indicazioni per ordinare:

- Completare la descrizione articolo con il taglio richiesto.

PFERDVALUE:

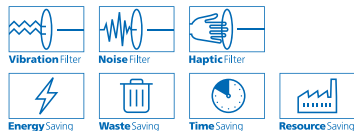

d ₁ [mm]	l ₂ [mm]	d ₂ [mm]	l ₁ [mm]	Taglio		giri/min		Descrizione
				INOX	INOX HC-FEP			
								
				EAN 4007220				

Diam. gambo 3 mm

3	7	3	37	034491	-	27.000–64.000	1	SPG 0307/3 ...
	13	3	43	034507	-	27.000–64.000	1	SPG 0313/3 ...
6	13	3	43	034514	-	13.000–32.000	1	SPG 0613/3 ...

Diam. gambo 6 mm

6	18	6	55	936948	-	13.000–32.000	1	SPG 0618/6 ...
8	20	6	60	952320	-	10.000–24.000	1	SPG 0820/6 ...
10	20	6	60	952337	N! 222409	8.000–19.000	1	SPG 1020/6 ...
12	25	6	65	936894	N! 222430	7.000–16.000	1	SPG 1225/6 ...