


CODICE 070

CODE 070

Norma:	DIN 179	Rules:	DIN 179
Materiale:	UNI 18NiCrMo5	Material:	UNI 18NiCrMo5
Trattamento:	cementate e temperate	Treatment:	case hardened and tempered
Durezza:	HRC 60/62	Hardness:	HRC 60/62
Esecuzione:	rettificate	Execution:	rectified
Esempio di ordinazione:	D	For orders indicate:	D



CODICE 071

CODE 071

Norma:	DIN 179	Rules:	DIN 179
Materiale:	UNI 18NiCrMo5	Material:	UNI 18NiCrMo5
Trattamento:	cementate e temperate	Treatment:	case hardened and tempered
Durezza:	HRC 60/62	Hardness:	HRC 60/62
Esecuzione:	rettificate	Execution:	rectified
Esempio di ordinazione:	D	For orders indicate:	D

D	D1	L
1 ÷	3	6
1.1 ÷ 1.8	4	6
1.9 ÷	5	6
2 ÷ 2.6	5	6
2.7 ÷ 3.3	6	8
3.4 ÷ 4	7	8
4.1 ÷ 5	8	8
5.1 ÷ 6	10	10
6.1 ÷ 8	12	10
8.1 ÷ 10	15	12
10.1 ÷ 12	18	12
12.1 ÷ 15	22	16
15.25 ÷ 18	26	16
18.25 ÷ 22	30	20
22.25 ÷ 26	35	20
26.5 ÷ 30	42	20
30.5 ÷ 35	48	25
35.5 ÷ 42	55	25
42.5 ÷ 48	62	30


D	D1	L
1 ÷	3	9
1.1 ÷ 1.8	4	9
1.9 ÷	5	9
2 ÷ 2.6	5	9
2.7 ÷ 3.3	6	12
3.4 ÷ 4	7	12
4.1 ÷ 5	8	12
5.1 ÷ 6	10	16
6.1 ÷ 8	12	16
8.1 ÷ 10	15	20
10.1 ÷ 12	18	20
12.1 ÷ 15	22	28
15.25 ÷ 18	26	28
18.25 ÷ 22	30	36
22.25 ÷ 26	35	36
26.5 ÷ 30	42	36
30.5 ÷ 35	48	45
35.5 ÷ 42	55	45
42.5 ÷ 48	62	56

Viti t.c. con gambo rettificato tolleranza h8 - 12.9 - UNBRAKO • Cylindrical head screw with rectified shank tolerance h8-12.9 - UNBRAKO

CODICE 097

CODE 097

Materiale:	acciaio per viteria	Materials:	steel for bolts and screw
Durezza:	HRC 38/44	Hardness:	HRC 38/44
Esempio di ordinazione:	D X L	For orders indicate:	D X L

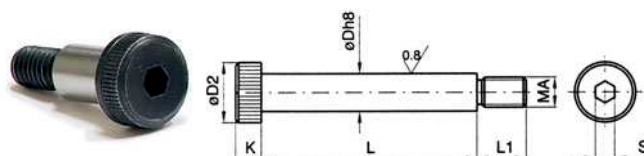

D	6	8	10	12	16	20	24
MA	M5x0.8	M6x1	M8x1.25	M10x1.5	M12x1.75	M16x2	M20x2.5
D2	10	13	16	18	24	30	36
K	4.5	5.5	7	9	11	14	16
L1	9.5	11	13	16	18	22	27
S	3	4	5	6	8	10	12
c.s. KG/mm	0.5	1	2.4	4.7	9.1	22.6	46.1
L							
10							
12							
16							
20							
25							
30							
40							
50							
60							
70							
80							
90							
100							
120							

