


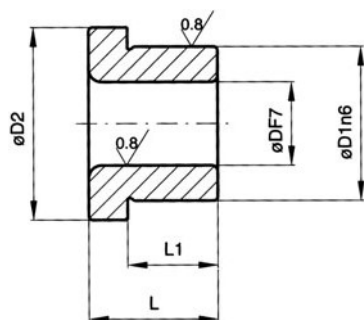

CODICE 072


Norma: DIN 172
Materiale: UNI 18NiCrMo5
Trattamento: cementate e temperate
Durezza: HRC 60/62
Esecuzione: rettificate
Esempio di ordinazione: D

CODE 072

Rules: DIN 172
Material: UNI 18NiCrMo5
Treatment: case hardened and tempered
Hardness: HRC 60/62
Execution: rectified
For orders indicate: D

D	D1	D2	L	L1
1 ÷	3	6	6	4
1.1 ÷ 1.8	4	7	6	4
1.9 ÷	5	8	6	4
2 ÷ 2.6	5	8	6	4
2.7 ÷ 3.3	6	9	8	5.5
3.4 ÷ 4	7	10	8	5.5
4.1 ÷ 5	8	11	8	5.5
5.1 ÷ 6	10	13	10	7
6.1 ÷ 8	12	15	10	7
8.1 ÷ 10	15	18	12	9
10.1 ÷ 12	18	22	12	8
12.1 ÷ 15	22	26	16	12
15.25 ÷ 18	26	30	16	12
18.25 ÷ 22	30	34	20	15
22.25 ÷ 26	35	39	20	15
26.5 ÷ 30	42	46	20	15
30.5 ÷ 35	48	52	25	20
35.5 ÷ 42	55	59	25	20
42.5 ÷ 48	62	66	30	24

Bussole con collare DIN 172 lunghe • Long bushes with collar DIN 172

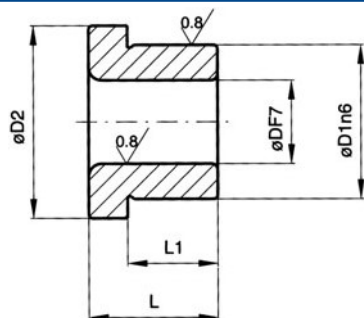

CODICE 073

Norma: DIN 172
Materiale: UNI 18NiCrMo5
Trattamento: cementate e temperate
Durezza: HRC 60/62
Esecuzione: rettificate
Esempio di ordinazione: D

CODE 073

Rules: DIN 172
Material: UNI 18NiCrMo5
Treatment: case hardened and tempered
Hardness: HRC 60/62
Execution: rectified
For orders indicate: D

D	D1	D2	L	L1
1 ÷	3	6	9	7
1.1 ÷ 1.8	4	7	9	7
1.9 ÷	5	8	9	7
2 ÷ 2.6	5	8	9	7
2.7 ÷ 3.3	6	9	12	9.5
3.4 ÷ 4	7	10	12	9.5
4.1 ÷ 5	8	11	12	9.5
5.1 ÷ 6	10	13	16	13
6.1 ÷ 8	12	15	16	13
8.1 ÷ 10	15	18	20	17
10.1 ÷ 12	18	22	20	16
12.1 ÷ 15	22	26	28	24
15.25 ÷ 18	26	30	28	24
18.25 ÷ 22	30	34	36	31
22.25 ÷ 26	35	39	36	31
26.5 ÷ 30	42	46	36	31
30.5 ÷ 35	48	52	45	40
35.5 ÷ 42	55	59	45	40
42.5 ÷ 48	62	66	56	50