

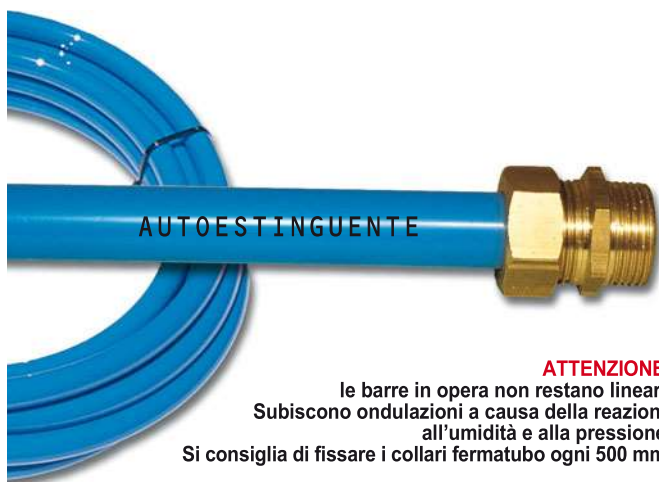
!!! ATTENZIONE - ATTENTION !!!

Si sono riscontrate corrosioni sui tubi in **autoestinguente e alluminio** a causa di olii Estere sintetici. Consigliamo di installare sempre un **essiccatore + un filtro ceramico QF da 5 micron + un filtro a coalescenza HF da 0,01 micron** e **cambiare il filtro HF ogni 24 mesi**.

In linee sotto terra, i tubi devono essere sfilabili (non murati) e consigliamo tubi Rilsan PA11 o PA12 neutri o blu, più resistenti agli agenti corrosivi.

*We noticed some corrosions on **self-extinguishing and aluminium hoses** due to synthetic ester oils. We suggest to always install a **dryer + a QF antidust filter of 5 micron + a HF coalescing filter of 0,01 micron** and **change HF filter every 24 months**.*

Regarding underground lines, the hoses must be extractable (not walled) and we suggest to use blue or neutral colour Rilsan PA11 or PA12 hoses, more resistant to corrosive agent.

**ATTENZIONE:**

le barre in opera non restano lineari.
Subiscono ondulazioni a causa della reazione all'umidità e alla pressione.

Si consiglia di fissare i collari fermatubo ogni 500 mm.

ATTENTION:

The bars undergo undulations caused by humidity and pressure, we suggest you to fix the clamps for hose every 500 mm.

**TUBO PA12 AUTOESTINGUENTE IGNIFUGO PER IMPIANTI PNEUMATICI
PA12 SELF-EXTINGUISHING FIRE PROOF BAR FOR PNEUMATIC INSTALLATIONS**

CODICE CODE	SEZIONE SECTION	BARRE mt. BARS mt.
BTRAT1210	12 x 10	4
BTRAT1512	15 x 12	4
BTRAT1815	18 x 15	4
BTRAT2218	22 x 18	4
BTRAT2420	24 x 20	4
BTRAT2824	28 x 24	4
BTRAT4034	40 x 34	4

CODICE CODE	SEZIONE SECTION	ROTOLI mt. ROLLS mt.
TRAT1210	12 x 10	100
TRAT1512	15 x 12	50-100
TRAT1815	18 x 15	50
TRAT2218	22 x 18	50
TRAT2420	24 x 20	50
TRAT2824	28 x 24	50
TRAT4034	40 x 34	50



ATTENZIONE: Caratteristiche tecniche. Pressione di utilizzo a temperatura di 23°C ÷ 15 bar.

Su richiesta si possono avere certificazioni SGS delle barre Ø 22 x 1,5 - Ø 28 x 1,5 - Ø 40 x 2.

ATTENTION: Technical characteristics. Working pressure: temperature 23°C ÷ 15 bar.

On request we can issue SGS Certifications for bars Ø 22 x 1,5 - Ø 28 x 1,5 - Ø 40 x 2.

**TUBO IN ALLUMINIO ANODIZZATO ANTICORODAL 60÷60
ANTICORODAL ANODIZED ALUMINIUM BAR 60÷60**

CODICE CODE	SEZIONE SECTION	BARRE mt. BARS mt.	CONFEZIONE PACKAGING
BAT1530	15 x 13	3	15
BAT1830	18 x 16	3	15
BAT2230	22 x 19	3	12
BAT2830	28 x 25	3	9
BAT4030	40 x 36	3	5
BAT6330	63 x 59	3	-

BAT1560	15 x 13	6	15
BAT1860	18 x 16	6	15
BAT2260	22 x 19	6	12
BAT2860	28 x 25	6	9
BAT4060	40 x 36	6	5
BAT6360	63 x 59	6	-

**DISTRIBUTORE
PORTING BLOCK**

CODICE CODE	Misura SECTION
JB54	1/2"

**STAFFA
BRACKET**

CODICE CODE	Misura SECTION
ST210	210 mm.