

Service MANOSKOP® 730


- click-type
- mount for interchangeable insert/shell tools
- QuickRelease safety lock (sizes 5-65)
- Rapid setting thanks to easy-action locking lever in the handle
- Ergonomically designed, non-slip adjuster with a thumb recess
- Magnifying glass integrated in the display window
- Optimised convex handle for strain-free working
- dual stop signal
- twin scales N·m/ft·lb and N·m/in·lb (sizes 5-80)
- the measuring element is only under load while force is being applied, no need for manual reset

209-215

- to zero
- can be applied for either clockwise or anticlockwise tightening by turning the inserts over
- any force applied to the tool after the 'click' or applied in the opposite direction to the current function - e.g. forcible loosening of a jammed screw - does not act on the trigger mechanism and cannot cause damage to it.
- calibration using perfectControl calibrating unit No 7794 or calibration system No 7706. Adjustment without disassembly.
- with certificate
- display deviation value $\pm 4\%$

730 Quick Service MANOSKOP® torque wrenches with mount for insert tools

NEW




730/5 Quick

Code	size						b mm	h mm	L mm	L _F mm	S _F mm	Δ g
50 18 40 05	5	6-50 N·m	5-36 ft·lb	2 N·m	1 ft·lb	9x12	28	23	315	287.5	17.5	780
50 18 40 10	10	20-100 N·m	15-72.5 ft·lb	2.5 N·m	2.5 ft·lb	9x12	28	23	370	343	17.5	940
50 18 40 12	12	25-130 N·m	20-95 ft·lb	2.5 N·m	2.5 ft·lb	14x18	28	23	410	386	25	1080
50 18 40 20	20	40-200 N·m	30-145 ft·lb	5 N·m	5 ft·lb	14x18	28	23	455	431.5	25	1210
50 18 40 40	40	80-400 N·m	60-300 ft·lb	10 N·m	10 ft·lb	14x18	28	23	590	571.5	25	1620
50 18 40 65	65*	130-650 N·m	100-480 ft·lb	20 N·m	20 ft·lb	14x18	30.6	25.6	875	855	25	3190
50 18 45 65 II/65	II/65	130-650 N·m	100-480 ft·lb	20 N·m	20 ft·lb	22x28	30.6	25.6	897	906	55	4100
50 58 40 05	a/5	6-50 N·m	50-440 in·lb	2 N·m	10 in·lb	9x12	28	23	315	287.5	17.5	780
50 58 40 10	a/10	20-100 N·m	180-880 in·lb	2.5 N·m	20 in·lb	9x12	28	23	370	343	17.5	940
50 58 40 12	a/12	25-130 N·m	225-1150 in·lb	2.5 N·m	25 in·lb	14x18	28	23	410	386	25	1080
50 58 40 20	a/20	40-200 N·m	350-1750 in·lb	5 N·m	50 in·lb	14x18	28	23	455	431.5	25	1210

* recommended ratchet insert tool No 735/40HD


730 Service MANOSKOP® torque wrenches with mount for insert tools



730/2

Code	size				b mm	h mm	L mm	L _F mm	S _F mm	Δ g
50 18 00 02	2	4-20 N·m	0.5 N·m	9x12	27.5	23	178.5	174	17.5	315
50 18 00 04	4	8-40 N·m	1 N·m	9x12	27.5	23	222	218	17.5	395
50 58 00 01	a/2-1	17.5-87.5 in·lb	2.5 in·lb	9x12	27.5	23	178.5	174	17.5	315
50 58 00 02	a/2	30-175 in·lb	5 in·lb	9x12	27.5	23	178.5	174	17.5	315
50 58 00 04	a/4	70-350 in·lb	10 in·lb	9x12	27.5	23	222	218	17.5	395

730/80 Service MANOSKOP® torque wrenches with mount for insert tools

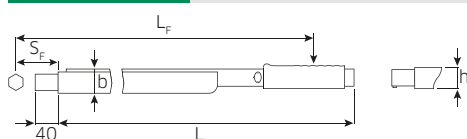

730/80

Code						b mm	h mm	L mm	L _F mm	S _F mm	Δ g
50 18 00 80	160-800 N·m	120-600 ft·lb	20 N·m	20 ft·lb	24.5x28	46	43	970	990	95	5377

Use shell adaptor No 7370/80 to make 14 x 18 mm insert tools fit.