


Standard MANOSKOP® 721 Quick

- click-type
- Rapid setting thanks to easy-action locking lever in the handle
- Ergonomically designed, non-slip adjuster with a thumb recess
- Magnifying glass integrated in the display window
- dual stop signal
- twin scales N·m/ft·lb
- the measuring element is only under load while force is being applied, no need for manual reset to zero
- Optimised convex handle for strain-free working
- any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw – does not act on the trigger mechanism and cannot cause damage to it.
- all the sensitive components are protected by the sturdy tubular steel housing
- calibration using perfectControl calibrating unit No 7794 or calibration system No 7706. Adjustment without disassembly.
- with certificate
- display deviation value $\pm 4\%$

721 Quick

Standard MANOSKOP® torque wrenches permanently installed ratchet

NEW

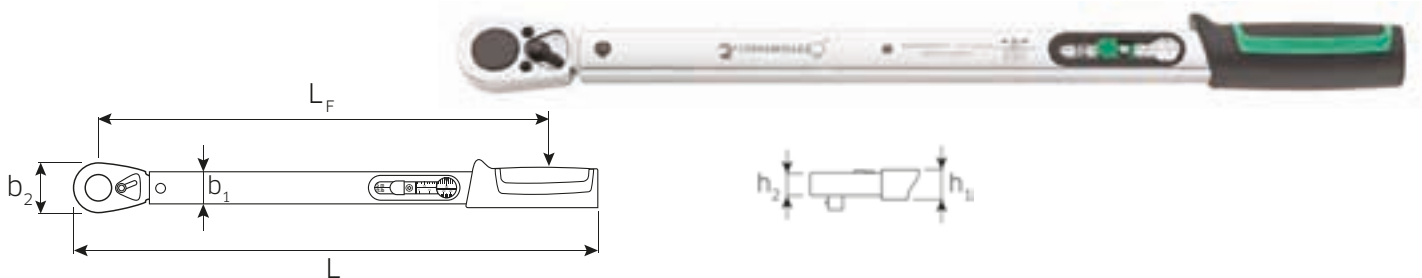


Code	size						b ₁ mm	b ₂ mm	h ₁ mm	h ₂ mm	L mm	L _F mm	$\Delta\theta$ g
50 20 40 05	5	6-50 N·m	5-36 ft·lb	2 N·m	1 ft·lb	3/8	28	27.5	23	14.5	349.7	291	880
50 20 40 15	15	30-150 N·m	25-110 ft·lb	5 N·m	5 ft·lb	1/2	28	41	23	18	452.5	387	1280
50 20 40 20	20	40-200 N·m	30-150 ft·lb	5 N·m	5 ft·lb	1/2	28	41	23	18	482	416.5	1350
50 20 40 30	30	60-300 N·m	50-220 ft·lb	10 N·m	10 ft·lb	1/2	28	44	23	27.5	553	486	1650

size 30 with push through square drive for anticlockwise torquing (spare square drive, refer to page 220)

721QR Quick

Standard MANOSKOP® torque wrench with permanently installed QuickRelease ratchet

NEW

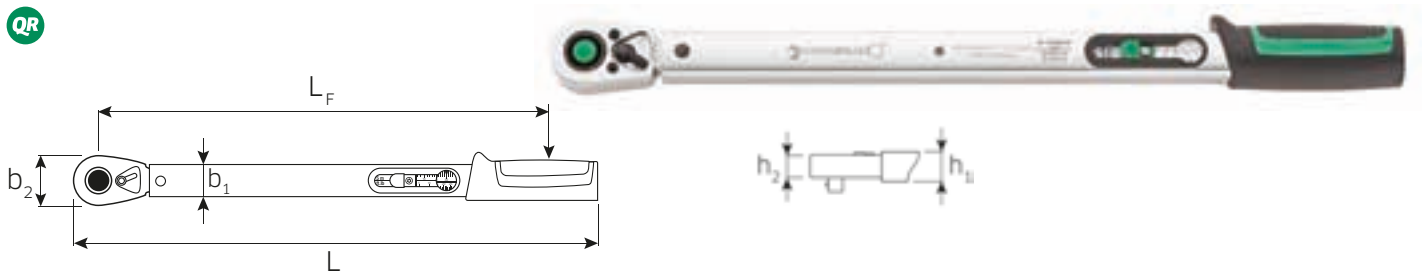

Code	size						b ₁ mm	b ₂ mm	h ₁ mm	h ₂ mm	L mm	L _F mm	$\Delta\theta$ g
50 20 41 15	15	30-150 N·m	25-110 ft·lb	5 N·m	5 ft·lb	1/2	28	41	23	18	452.5	387	1268
50 20 41 20	20	40-200 N·m	30-150 ft·lb	5 N·m	5 ft·lb	1/2	28	41	23	18	482	416.5	1330

721QR/20/3/1 Quick

Wheel-fitting set

NEW

QR

Set of 5 in sturdy plastic case.

Contents

- 1 Standard MANOSKOP® No 721QR/20 Quick, 40-200 N·m, 30 - 150 ft·lb, with permanently installed QuickRelease ratchet, reversible, 1/2" drive
- 3 wheel nut sockets No 51 IMP K, sizes 17 (green), 19 (blue), 20.8 mm (red)
- 1 extension 130 mm No 509QR/5



Code	$\Delta\theta$ g	
96 50 72 14	2965	1