


Torque tools

Standard MANOSKOP® 720Nf/721Nf


- click-type
- easy setting
- dual stop signal
- twin scales N·m/ft·lb
- anticlockwise torquing thanks to swap-over square drive
- all the sensitive components are protected by the sturdy tubular steel housing in the U-shaped aluminium profile
- calibration using perfectControl calibrating unit No 7794 or calibration system No 7706. Adjustment without disassembly.
- with certificate
- display deviation value $\pm 4\%$

720Nf/80 Standard MANOSKOP® torque wrench with permanently installed square drive

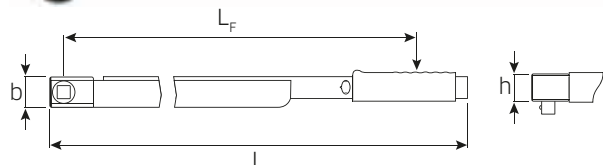

Code					"	b mm	h mm	L mm	L _F mm	S _F mm	ΔΔ g
50 19 00 81	160-800 N·m	120-600 ft·lb	20 N·m	20 ft·lb	3/4	45	42	1034	938	0	6102

721Nf Standard MANOSKOP® torque wrenches with permanently installed ratchet

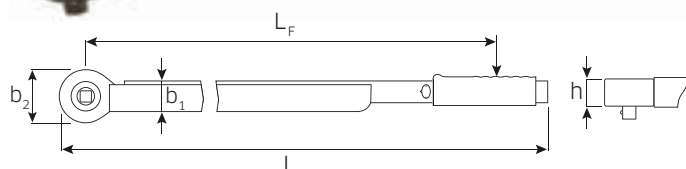

Code	size					"	b ₁ mm	b ₂ mm	h mm	L mm	L _F mm	ΔΔ g
50 20 00 81	80	160-800 N·m	120-600 ft·lb	20 N·m	20 ft·lb	3/4	46.5	76	42	1051	938	7222
96 50 20 01	100	200-1000 N·m	150-725 ft·lb	25 N·m	25 ft·lb	3/4	46.5	76	42	1504	1365	7005

730R/40/32 Quick Torque wrench set

32 pieces, in steel case, for general service work.

Content:

- 1 SERVICE-MANOSKOP® No 730/40 Quick, 80-400 N·m
- 1 ratchet insert tool No 735/20, reversible, 1/2" ■-drive
- 1 square drive insert tool No 734/20, 1/2" ■-drive
- 7 o/e insert tools No 731/40, sizes 13, 15, 17, 19, 22, 27, 30 mm
- 1 No 3731/40 size 24 mm;
- 7 ring insert tools No 732/40, sizes 13, 15, 17, 19, 22, 24, 27 mm
- 10 sockets, bi-hexagon No 50, sizes 13, 14, 15, 17, 19, 22, 24, 27, 30, 32 mm
- 4 accessories, 1/2" ●-drive:
 - 1 T-handle No 506
 - 1 extension 255 mm No 509/10
 - 1 extension 130 mm No 509/5
 - 1 extension 55 mm No 509/2



Code		ΔΔ g	
96 50 20 53		9739	1