


Spanners

12 Small double open ended spanners ELECTRIC

Chrome Alloy Steel, chrome plated.

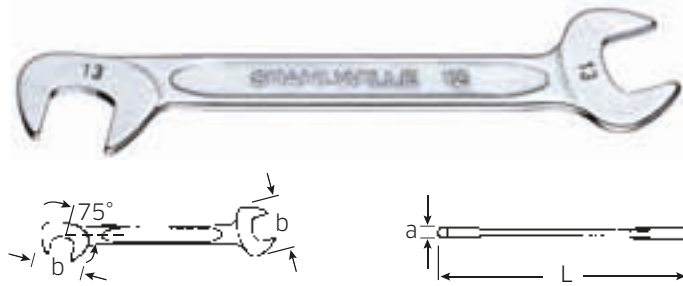

Code	mm	L mm	b mm	a mm	Δ g	
40063232	3.2	70	10.5	2	5	10
40063535	3.5	70	10.5	2	5	10
40060404	4	70	10.5	2	5	10
40064545	4.5	70	10.5	2	5	10
40060505	5	78	12.6	2	7	10
40065555	5.5	78	12.6	2	7	10
40060606	6	78	12.6	2	6	10
40060707	7	91	14.7	2	9	10
40060808	8	96	16.8	3	16	10
40060909	9	103	18.9	3	19	10
40061010	10	105	21	3	22	10
40061111	11	116	24.2	3	27	10
40061212	12	116	24.2	3	27	10
40061313	13	131	28.3	3	37	10
40061414	14	131	28.3	3	36	10

12a Small double open ended spanners ELECTRIC

Code	"	L mm	b mm	a mm	Δ g	
40461010	5/32	70	10.5	2	5	10
40461212	3/16	70	10.5	2	5	10
40461313	13/64	78	12.6	2	7	10
40461414	7/32	78	12.6	2	6	10
40461515	15/64	78	12.6	2	6	10
40461616	1/4	91	14.7	2	9	10
40461818	9/32	91	14.7	2	9	10
40462020	5/16	96	16.8	3	16	10
40462222	11/32	103	18.9	3	19	10
40462424	3/8	105	21	3	22	10
40462828	7/16	116	24.2	3	28	10
40463232	1/2	131	28.3	3	37	10
40463434	9/16	131	28.3	3	36	10

12, 12a Sets: Small double open ended spanners ELECTRIC, in roll-up wallet

Roll-up wallet made of extremely tough textile with Velcro fastener.




Code	No	Content mm/"	Δ g
96400653	12/10	4; 4.5; 5; 5.5; 6; 7; 8; 9; 10; 11	161
96400651	12/15	3.2; 3.5; 4; 4.5; 5; 5.5; 6; 7; 8; 9; 10; 11; 12; 13; 14	296
96404654	12a/13	5/32; 3/16; 13/64; 7/32; 15/64; 1/4; 9/32; 5/16; 11/32; 3/8; 7/16; 1/2; 9/16	270

13 Combination spanners OPEN-BOX



DIN 3113 form A/ISO 7738 form A (metric sizes), Chrome Alloy Steel, chrome plated.

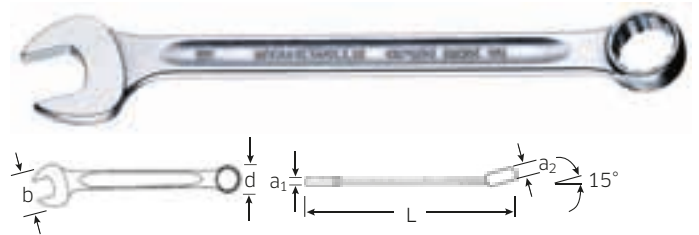

Code	mm	L mm	b mm	d mm	a1 mm	a2 mm	Δ g	
40085500	5.5	100	14.8	9.2	3.5	5.8	13	10
40080606	6	105	15.5	9.9	3.6	6	15	10
40080707	7	110	17	11.3	3.9	6	20	10
40080808	8	115	18	12.4	4.2	7	21	10
40080909	9	120	21	13.4	4.5	7	27	10
40081010	10	125	23	14.8	4.8	7	35	10
40081111	11	135	26	16.4	4.8	8	43	10
40081212	12	140	28	17.8	5.3	8.5	46	10
40081313	13	160	30	19.1	5.3	8.5	57	10
40081414	14	165	32	20.6	5.3	8.5	68	10
40081515	15	170	35	21.9	5.3	8.5	73	10
40081616	16	180	37	23.2	5.8	10	89	10
40081717	17	190	38	24.6	5.8	10	99	10
40081818	18	200	40	26	6.7	11.5	126	10
40081919	19	230	42	27.5	6.7	11.5	142	10
40082020	20	230	45	29	7	13	176	10
40082121	21	260	47	30.3	7.3	13	216	10
40082222	22	260	49	31.8	7.3	13	220	10
40082323	23	280	53	33.5	7.8	14	251	5
40082424	24	280	53	34.9	7.8	14	254	5
40082525	25	300	55	36.3	8.4	14.5	281	5
40082626	26	300	57.5	37.8	8.4	14.5	315	5
40082727	27	300	60	39.2	8.4	14.5	345	5
40082828	28	320	62	40.6	8.4	14.5	368	5
40082929	29	330	64	41.9	8.9	16	420	5
40083030	30	330	66	43.2	8.9	16	404	5
40083232	32	360	70	45.8	9.4	16.5	484	5
40083434	34	450	75	48	9.4	17	683	1
40083636	36	460	80	50.8	10	18	787	1
40083838	38	480	87	53.6	11	19	915	1
40084141	41	480	88	57.8	11	19	1055	1
40084646	46	500	94.5	65.2	13	20	1352	1
40085050	50	530	103	73	14	21	1700	1
40085555	55	560	114	81	15	22	2193	1
40086060	60	590	125	89.8	16	24	2825	1

STAHLWILLE »AS-Drive«



The rings of STAHLWILLE combination spanners and double ended ring spanners are equipped with the AS-Drive® profile: this permits high transmission of forces to the lands of nuts and bolts without damaging them. No longer will you have to worry about stripping the corners off nuts and bolts.

*Anti-Slip-Drive