

## Socket sets and sockets


10  
3/8"

DIN  
3120

ISO  
1174-1

### 427W Wobble-Drive extensions

- swivel angle 15° each side
- max. torque 80 N·m

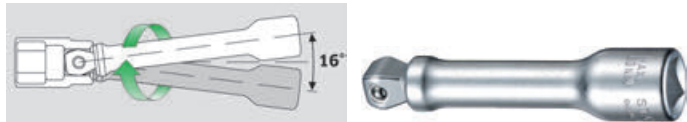

Code	size	L mm	d mm	g	g	g
12010007	3	76	17	67	5	
12010008	5	125	17	104	5	
12010009	6	160	17	127	5	

### 427QR QuickRelease extensions

QR

- patent
- DIN 3123/ISO 3316



Code	size	L mm	d mm	g	g	g
12011001	3	76	17	66	1	
12011002	6	160	17	127	1	
12011003	10	240	17	185	1	

### 433/1 Locking adaptor

- with hexagon key wrench No 10760aCV 1/8"



Code	L mm	d mm	g	g	g
96122701	52	18	57	1	

### 434 Extension, flexible

- right hand rotation only
- maximum torque 7 N·m



Code	L mm	d mm	g	g	g
12040000	194	14	109	5	

### 1225 Special extension

- offset



Code	L mm	d mm	g	g	g
12250001	150	17	128	5	

### 13220 Special extension

- for removing boroscope plugs
- with boroscope plug locking
- external hexagon 16 mm



Code	L mm	g	g	g
12270020	355	330	1	

### 428 Universal joint

- DIN 3123/ISO 3316




Code	L mm	d mm	g	g	g
12020000	46	18.8	55	5	

### 428QR QuickRelease universal joint

QR

- patent
- DIN 3123/ISO 3316
- with QuickRelease safety lock



Code	L mm	d mm	g	g	g
12021000	60	19	66	1	

### 5513 Set of adaptors

content 5 pieces:

- No 409, 1/4" socket x 3/8" plug
- No 431, 3/8" socket x 1/4" plug
- No 432, 3/8" socket x 1/2" plug
- No 513, 1/2" socket x 3/8" plug
- No 514, 1/2" socket x 3/4" plug



Code	g	g
96121003	648	

### 431 Reducing adaptor

HPQ

- 3/8" socket x 1/4" plug (10 x 6.3)
- maximum torque 62 N·m
- DIN 3123/ISO 3316
- HPQ® high performance steel



Code	L mm	d mm	g	g	g
12030001	28	17.2	26	5	