


Forma cilindrica con testa a sfera WRC

Fresa cilindrica con testa a sfera conforme alle Norme DIN 8032. Combinazione tra le geometrie cilindrica e a sfera.



PFERDVALUE:

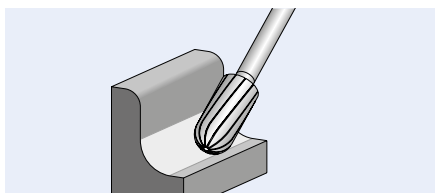

Vibration Filter



Noise Filter



Haptic Filter



Energy Saving



Waste Saving



Time Saving



Resource Saving

d_1 [mm]	l_2 [mm]	d_2 [mm]	l_1 [mm]	Taglio CAST 	giri/min		Descrizione
				EAN 4007220			

Diam. gambo 6 mm



6	16	6	55	952610	24.000–40.000	1	WRC 0616/6 CAST
10	20	6	60	952627	14.000–24.000	1	WRC 1020/6 CAST
12	25	6	65	952634	12.000–20.000	1	WRC 1225/6 CAST

Diam. gambo 8 mm

12	25	8	65	067932	12.000–20.000	1	WRC 1225/8 CAST
----	----	---	----	--------	---------------	---	-----------------

Forma a fiamma B

Fresa a fiamma conforme alle Norme ISO 7755/8.

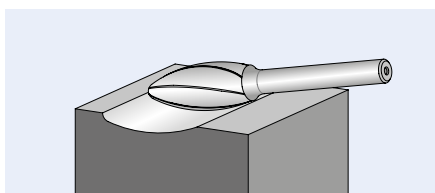

PFERDVALUE:



Vibration Filter



Noise Filter



Haptic Filter



Energy Saving



Waste Saving



Time Saving



Resource Saving

d_1 [mm]	l_2 [mm]	d_2 [mm]	l_1 [mm]	r [mm]	Taglio CAST 	giri/min		Descrizione
					EAN 4007220			

Diam. gambo 6 mm

12	30	6	70	2,1	952450	12.000–20.000	1	B 1230/6 CAST
----	----	---	----	-----	--------	---------------	---	---------------

Diam. gambo 8 mm

12	30	8	70	2,1	068021	12.000–20.000	1	B 1230/8 CAST
----	----	---	----	-----	--------	---------------	---	---------------

