

Sockets, Socket Sets

6.3
1/4"


DIN
3120

ISO
1174-1

44KTX

Screwdriver sockets

for inside TORX® screws, Chrome Alloy Steel, chrome plated.




Code	size	mm	L ₁ mm	L ₂ mm	d mm	△△ g	
01 35 00 08	T8	2.3	28	16	11.6	10	5
01 35 00 09	T9	2.5	28	16	11.6	10	5
01 35 00 10	T10	2.7	28	16	11.6	10	5
01 35 00 15	T15	3.3	28	16	11.6	10	5
01 35 00 20	T20	3.8	28	16	11.6	11	5
01 35 00 25	T25	4.4	28	16	11.6	11	5
01 35 00 27	T27	5.0	28	16	11.6	11	5
01 35 00 30	T30	5.5	28	16	11.6	11	5
01 35 00 40	T40	6.6	28	16	11.6	12	5

44KTXB

Screwdriver sockets

with hollow point, for inside TORX® screws (TORX® TAMPER RESISTANT), Chrome Alloy Steel, chrome plated.




Code	size	mm	L ₁ mm	L ₂ mm	d mm	△△ g	
01 35 10 08	T8	2.3	28	16	11.6	10	5
01 35 10 09	T9	2.5	28	16	11.6	10	5
01 35 10 10	T10	2.7	28	16	11.6	10	5
01 35 10 15	T15	3.3	28	16	11.6	10	5
01 35 10 20	T20	3.8	28	16	11.6	10	5
01 35 10 25	T25	4.4	28	16	11.6	11	5
01 35 10 27	T27	5.0	28	16	11.6	10	5
01 35 10 30	T30	5.5	28	16	11.6	11	5
01 35 10 40	T40	6.6	28	16	11.6	12	5

44P

Screwdriver sockets

for recessed head screws Phillips-Recess®, tips to DIN 5260, Chrome Alloy Steel, chrome plated.




Code	PH size	L ₁ mm	L ₂ mm	d mm	△△ g	
01 29 00 01	1	28	16	11.6	12	5
01 29 00 02	2	28	16	11.6	11	5
01 29 00 03	3	28	16	11.6	12	5
01 29 00 04	4	28	16	11.6	14	5

44PZ

Screwdriver sockets

for POZIDRIV®/SUPADRIV® screws, Chrome Alloy Steel, chrome plated.



Code	PZ size	L ₁ mm	L ₂ mm	d mm	△△ g	
01 30 00 01	1	28	16	11.6	10	5
01 30 00 02	2	28	16	11.6	11	5

40CL

Clip strips


for socket retention, with 9 or 10 retaining clips. Supplied without sockets.



Code	size	L mm	△△ g	
80 40 00 01	1	200	36	5
80 40 00 02	2	300	52	5

Drive tools and accessories

1/4" □, finish: Chrome Alloy Steel, chrome plated.

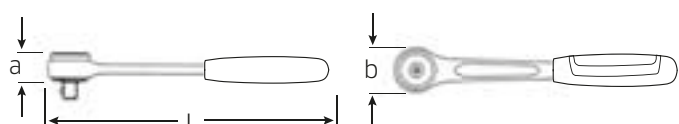

411

Ratchet, fine tooth

reversible, 60 teeth, with 2-component handle, for use in confined spaces, re-engages after movement of 6°, DIN 3122/ISO 3315.



Code	L mm	b mm	a mm	△△ g	
11 23 10 11	118	24	19.5	96	1

415

Ratchet

reversible, 22 teeth, with 2-component handle, DIN 3122/ISO 3315.



Code	L mm	b mm	a mm	△△ g	
11 11 10 10	117	22	13	80	5

415QR

QuickRelease ratchet

QR

reversible, 22 teeth, with QuickRelease safety lock and 2-component handle, DIN 3122/ISO 3315, registered design.



Code	L mm	b mm	a mm	△△ g	
11 11 00 20	117	22	13	79	1

415QR N

QuickRelease ratchet, fine tooth

QR

F&D

reversible, 80 teeth, with QuickRelease safety lock and 2-component handle, for use in confined spaces, re-engages after movement of 4.5°, construction without screws prevents foreign object damage, DIN 3122/ISO 3315, registered design.



Code	L mm	b mm	a mm	△△ g	
11 11 10 20	117	22.6	10.7	79	1